



12V Series

Smart Lithium Iron Batteries



50%

lighter than the lead acid battery of same capacity.

30%

higher than the energy density of the LiFePO₄ battery of same capacity.

4000+

More than 4,000 lifecycles to maximum your ROI.

APP

The built-in Bluetooth module allows real-time monitoring via mobile devices.

4S4P

Up to 16 batteries in 4S4P connection, building a battery system with a max. energy output of 40.96 kWh.

Self-heating


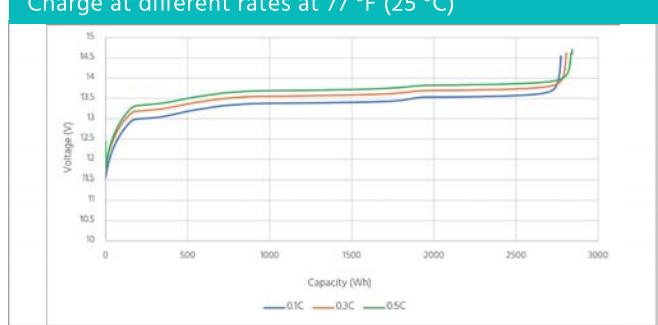
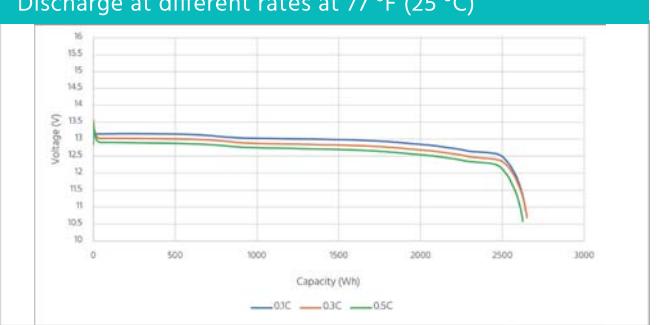
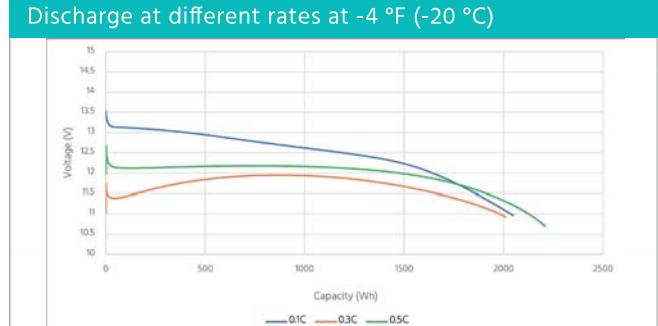
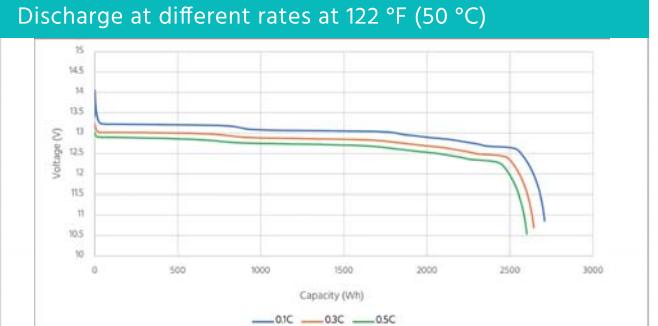
The internal heating film allows the battery to be charged in extreme cold.

APPLICATION

RV12200 is designed to replace deep cycle lead-acid batteries. The battery is perfect for recreational vehicles (RV), marine (boats), trucks, cabins, and other off-grid deep-cycle applications.



SPECIFICATION

Electrical Specifications		Mechanical Specifications	
Nominal Voltage	12.8 VDC	Dimensions (L × W × H)	18.07 × 7.48 × 8.46 in (459 × 190 × 215 mm)
Nominal Capacity	200 Ah	Weight	Approx. 46.08 lbs (20.9 kg)
Resistance	< 10mΩ	Terminal Type	M8 × 1.25 × 14 mm
Efficiency	99%	Terminal Torque	9 ± 1 Nm
Self Discharge	≤ 3% per month	Case Material	PC
Max. Batteries in Parallel or Series	4S4P	IP Rating	IP65
Cycle Life	> 4000	Cell Type-chemistry	LiFePO4
Max. Continuous Discharging Current	100 A		
Peak Discharging Current	200 A@5 s		
Max. Continuous Charging Current	100 A		
Recommended Charging Voltage	14 V~14.6 V		
Environment Specifications		Dimensions	
Discharging Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)		
Charging Temperature	32 °F ~ 131 °F (0 °C ~ 55 °C)		
Storage Temperature	-40 °F ~ 140 °F (-40 °C ~ 60 °C)		
Operating Temperature	-4 °F ~ 122 °F (-20 °C ~ 50 °C)		
Relative Humidity	5% ~ 95%		
Other			
Certifications	UL1973, FCC, CE, UKCA, Bluetooth SIG		
Communication	BLE 5.0		
Max. Altitude	13123 ft (4000 m)		
Heating Film	Support		
Mobile APP	Pylontech Auto		
Charge at different rates at 77 °F (25 °C)		Discharge at different rates at 77 °F (25 °C)	
			
Discharge at different rates at -4 °F (-20 °C)		Discharge at different rates at 122 °F (50 °C)	
			

*Product performance is based on testing in a controlled environment. Your results may vary due to several external and environmental factors.

